

# The JA-110N-DIN BUS PG-DIN power output module

The JA-110N-DIN is a component of the **JABLOTRON 100** system. It has been designed for mounting on a DIN rail. It provides a PG output power relay switch. The module can be used to control lighting, fan etc. The relay is a programmable output (PG) of the control panel. The module should be installed by a trained technician with a valid certificate issued by an authorized distributor.

## Installation

The module has been designed for mounting on a DIN rail. It is connected to a system BUS through which it is also powered. It is to be enrolled into the system and takes one position in the system.

1. Install the module on a DIN rail.
2. Connect the BUS cable to the terminals (1)

**When connecting the module to the system BUS, always switch the power off.**



**If the module is installed outside the guarded area, the JA-110T BUS insulator should be used for the external section of the wiring.**

**Electrical devices can only be connected by a trained technician.**

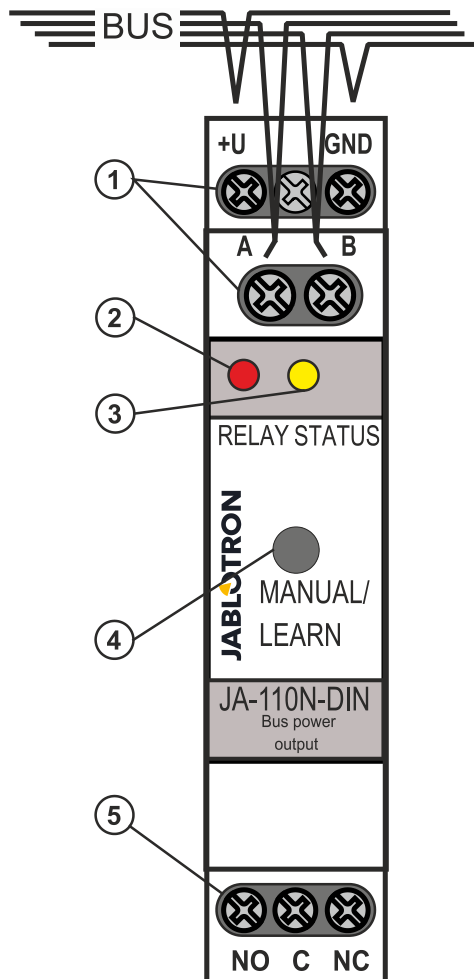


Figure: 1 – BUS terminals (CC-01(02) cable: +U red, GND black, A yellow, B green); 2 – red LED - relay triggering; 3 – yellow LED - fault; 4 – enrollment or manual trigger button; 5 – relay terminal

3. Proceed according to the control panel installation manual. Basic procedure:
  - a. When the module is switched on, the yellow LED (3) starts flashing repeatedly to indicate that the module has not been enrolled to the system.
  - b. Go to the **F-Link** software, select the required position in the **Devices** window and launch the enrollment mode by clicking on the **Enroll** option.
  - c. Press the **Manual/Learn** button (5) – the module is enrolled into the system and the yellow LED goes off.
4. Test the module function. When the module is switched on, the red LED (2) lights up.

5. Connect the device to be controlled by the relay to the relay output terminals (5).

## Module internal settings

The module settings can be set in the **Devices** tab in the **F-Link** software. At the module position, click on the **Internal settings** option to open a dialogue window where you can set the following:

**Manual control (5):** Enabled: short pressing of the button triggers the relay ON/OFF (*status*). System control commands (on the BUS) override the status selected with the button. Manual control is possible even in a situation when there is no communication with the control panel. The button control function can be completely disabled.

**Activation by a PG output:** It is possible to select the module activation by one or more PG outputs.

### Notes:

- Multiple modules can be enrolled into the system. The number of modules is only limited by the number of devices and by the power consumption from the BUS.
- If communication is lost (A-B BUS connections) for more than 60s, the module relay switches to idle mode.
- The module can also be enrolled into the system by entering its production code in the F-Link program. All numbers must be entered (example: 1400-00-0000-0001).
- The settings can also be set in the **F-Link – PG outputs** tab – **Activation** button – option **PG output activates device**

## Technical specification

Power	from control panel BUS 12 V (9 ...15 V)
Current consumption in standby mode (relay off/on)	5 mA/45 mA
Current consumption for cable selection	45 mA
Relay contact capacity (galvanically and securely separated from the BUS)	Class protection II: Maximum switched voltage 250 V AC/24 V DC
	Resistive load (cosφ=1) max. 16 A
	Inductive (capacitive) load (cosφ=0,4) max. 8 A
	Halogen lighting max. 1000 W
	Direct current DC 384 W
	Minimum DC switched output 0.5 W
Connected wires diameter	max. 2x 1.5 mm <sup>2</sup> max. 1x 2.5 mm <sup>2</sup>
Dimensions	18 x 90 x 64 mm
Operational environment	Indoor general
Operational temperature range	-10 to + 40 °C
Protection degree	IP-20
Complies with	EN 50130-4, EN 55022, EN 60950-1 DIN rail EN60715



JABLOTRON ALARMS a.s. hereby declares that the JA-110N-DIN is in a compliance with the relevant European Union harmonisation legislation: Directives No: 2014/35/EU, 2014/30/EU, 2011/65/EU, when used as intended. The original of the conformity assessment can be found at [www.jablotron.com](http://www.jablotron.com) – Section Downloads.



**Note:** Although this product does not contain any harmful materials we suggest you return the product to the dealer or directly to the producer after use.